

CF205-S adopts high-quality imported Hall components and utilizes the magnetic compensation principle to perform galvanic isolation measurement of DC, AC, or pulsed currents. The output current is proportional to the measured current, offering excellent accuracy, linearity, and stability.

Parameters

Electrical Specifications

- Rated Measurement Current: 200Arms
- Overload Capacity: $\pm 420\text{A}$ 3min max
- Turns Ratio: 1:2000
- Rated Output Current: 100mA
- Supply Voltage: $\pm 12 \sim \pm 15\text{V}$
- Secondary Current Consumption: 17mA(@ $\pm 15\text{V}$) + output measurement current
- Dielectric Strength: 3.8kVrms/50Hz/1min (between primary and secondary circuits)
- Load Resistance: $\leq 26\Omega$ at $\pm 15\text{V}$ (max measurement current 420 A)
 $\leq 12\Omega$ at $\pm 12\text{V}$ (max measurement current 420 A)


Accuracy & Dynamic Performance

- Accuracy: $\pm 0.5\%$
- Non-Linearity: $\pm 0.1\%$
- Zero Offset: $\leq \pm 0.2\text{mA}$
- Response Time: $\leq 1\mu\text{s}$
- di/dt : $> 50\text{A}/1\mu\text{s}$

General Data

- Operating Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Storage Temperature: $-45^{\circ}\text{C} \sim +90^{\circ}\text{C}$
- Weight: $\leq 78\text{g}$

Outline & Interface

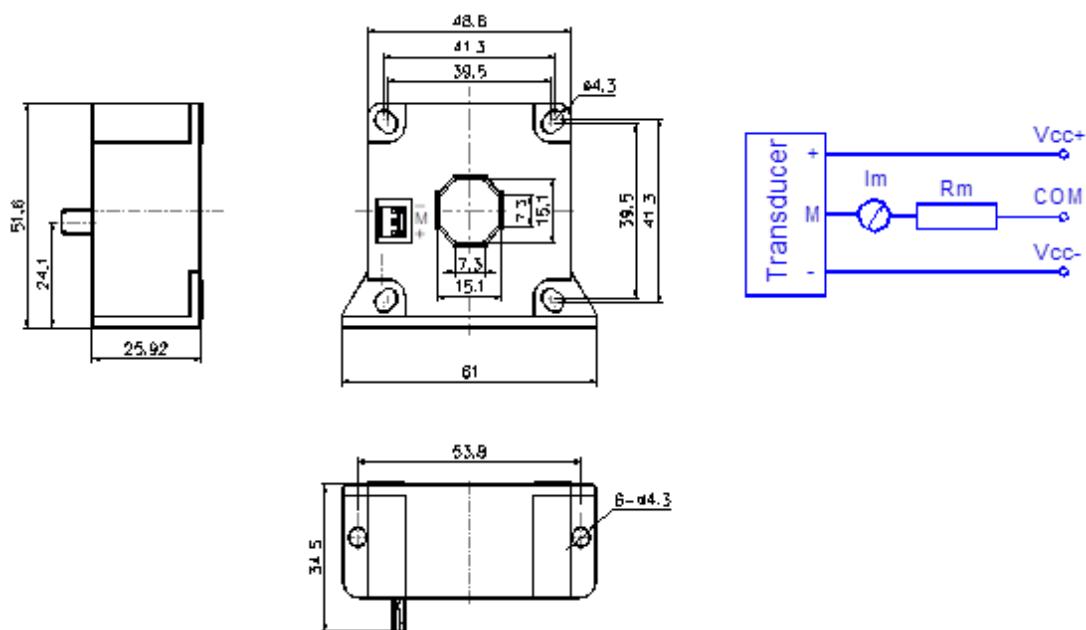

Notes

- The output current is positive when the direction of the measured current matches the arrow mark on the product housing; Otherwise, the output is negative.